

MENARDS®

DEHUMIDIFIERS,
ACs & FANS

DEHUMIDIFIERS

AIR CONDITIONERS

RESIDENTIAL FANS

COMMERCIAL FANS




DEHUMIDIFIERS



Dehumidifiers that are built to perform and earn your trust.

Safety and functionality are what makes Soleus dehumidifiers unlike any other on the market. Soleus has created patent-pending technology that makes safety and convenience the priority.

Smart & Safe Features.

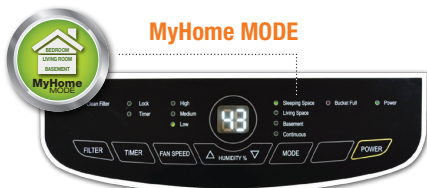

Take the guesswork out of using your dehumidifier by choosing pre-set humidity levels that are perfectly balanced for your sleeping space, living space and basement with one touch of a button.



tri-pat
PATENT-PENDING
SAFETY TECHNOLOGY



Soleus Safe™

Soleus Dehumidifiers exceed UL Standards and feature safety technology to make them safer to use. Patent-pending overheat sensors, automatic cool-down cycles, and electrical current sensors are built in as an added layer of protection.

Child Lock

Protect your control panel settings against curious little hands that like to push buttons.

Dehumidifier

Area In Square Feet		500	1,000
Moderately Damp	-Feels damp & has musty odor only in humid weather	*30 Pints	*30 Pints
Very Damp	-Always damp & has musty odor -Damp spots on walls	*30 Pints	*30 Pints
Wet	-Space feels & smells wet -Walls & floor sweat	*45 Pints	*45 Pints
Extremely Wet	-Wet floor, wet walls -Very musty/wet odor	*45 Pints	*70 Pint

*Maximum amount of moisture removed in a 24 hour period — calculation is based on single level open floor plan.
For structures with multiple levels or rooms, additional dehumidifiers may be needed

Why buy a dehumidifier?

Dehumidifiers remove excess moisture from indoor air and make living spaces more comfortable. From basements to bedrooms, dehumidifiers are great for keeping indoor humidity levels under control.



Caster

Heavy-duty casters make it easy to roll the unit from room-to-room.



Washable Filter

Convenient to clean and easy to maintain.



Continuous Drain Option

Available on all models

Install a garden hose* directly to the back of the unit for easy gravity draining so that you never have to empty the bucket.

*Garden hose not included



Internal Pump

Available on sku 623-5221

Pumps water out of the unit and up to 16 feet with included hose so you never have to empty the bucket.



41 DEGREES LOW TEMPERATURE OPERATION

keeps the unit running during colder months



AUTO DEFROST

Keeps the unit operating smoothly and worry free



ULTRA QUIET OPERATION

is perfect for areas like bedrooms and family rooms



BUCKET FULL INDICATOR

automatically reminds you to empty the bucket







ADJUSTABLE HUMIDISTAT

digital and precise humidity control

Sizing Guide

1,500	2,000	2,500	3,000	3,500	4,000
*30 Pints	*30 Pints	*45 Pints	*45 Pints	*45 Pints	*70 Pints
*45 Pints	*45 Pints	*45 Pints	*45 Pints	*70 Pints	*90 Pints
*45 Pints	*45 Pints	*45 Pints	*70 Pint	*90 Pints	*90/110 Pints
*70 Pint	*70 Pint	*70 Pint	*90 Pints	*90/110 Pints	*90/110 Pints











Water Removal, Pints per Day		30 Pint	45 Pint
Menard SKU		623-5210	623-5211
Model #		HMT-D30-A	HMT-D45E-A
Water Removal Options	Removable Bucket Size Pints	8.5	8.5
	Continuous Drain	Yes	Yes
	Built-in Pump	No	No
Bucket Full Indicator		Yes	Yes
Bucket Full Auto Shutoff		Yes	Yes
Electronic Controls		Yes	Yes
Modes of Operation	My Home* (Automatic)	Yes	Yes
	Continuous	Yes	Yes
	Manual	Yes	Yes
Adjustable Humidistat Range		35%-80%	35%-80%
3 Fan Speeds		Yes	Yes
24 Hour Timer		Yes	Yes
Low Temp Operation, as low as 41°		Yes	Yes
Automatic Defrost		Yes	Yes
Power Failure Restart		Automatically restarts when power is restored and remembers all settings prior to power loss	Automatically restarts when power is restored and remembers all settings prior to power loss
Refrigerant Type		R410A	R410A
Removable/Washable Filter		Yes	Yes
Plug Type		115 Volt  370 watt - 3.2 amp	115 Volt  450 watt - 4.5 amp
Dimensions - (W x H x D)		13-3/4" x 19-1/2" x 10"	13-3/4" x 19-1/2" x 10"
Weight		31.1 lbs	33.7 lbs
Cord Length		72"	72"
Safety Certification			
Warranty		1 Year	1 Year

* My Home Mode: Preset humidity levels that are balanced for your sleeping space, living space and basement.

DEHUMIDIFIERS



70 Pint	70 Pint	90 Pint	110 Pint
623-5212	623-5221	623-5222	623-5223
HMT-D70E-A	HMT-D70EIP-A	HMB-D90-B	HMB-D110-C
16.9	14.8	13	13
Yes	Yes	Yes	Yes
No	Yes	No	No
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
35%-80%	35%-80%	35%-80%	35%-80%
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Automatically restarts when power is restored and remembers all settings prior to power loss	Automatically restarts when power is restored and remembers all settings prior to power loss	Automatically restarts when power is restored and remembers all settings prior to power loss	Automatically restarts when power is restored and remembers all settings prior to power loss
R410A	R410A	R410A	R410A
Yes	Yes	Yes	Yes
115 Volt 	115 Volt 	115 Volt 	115 Volt 
730 watt - 6.5 amp	730 watt - 6.5 amp	40 watt - 7.1 amp	830 watt - 7.9 amp
15-1/4" x 24-7/8" x 11-1/4"	15-1/4" x 24-7/8" x 11-1/4"	18-1/4" x 24-5/8" x 14-1/2"	18-1/4" x 24-5/8" x 14-1/2"
46.9 lbs	49.41 lbs	59.4 lbs	59.4 lbs
72"	72"	72"	72"
			
1 Year	1 Year	1 Year	1 Year



Air conditioners that change the way you think of air conditioning.

Soleus portable air conditioners are perfect for cooling spaces that you occupy most. They're quick to install, convenient to move room-to-room and simple to use.

Smart & Cool Features.



Touch Panel Control

Easily navigate the control panel with a simple touch of the icons. Soleus makes operation simple.



**High Dehumidification
CAPACITY**

Dehumidifier Mode

Removing excess moisture is the key to a comfortable cool. Soleus Portable A/C's offer some of the highest dehumidification ratings available on the market.











All-Season Comfort

The Soleus LX-140 model has a built-in heat pump so that you can use it as a powerful 14,200 BTU heater during the colder months.

PORTABLE AIR CONDITIONERS









Cooling BTU's	8,000	10,000	12,000	14,000
Heating BTU's	N/A	N/A	N/A	14,200
Menard SKU	623-5600	623-5602	623-5603	459-0514
Model #	TM-PAC-08E3	TM-PAC-10E3	TM-PAC-12E4	LX-140
Cools Up To	250 sq. ft.	350 sq. ft.	450 sq. ft.	550 sq. ft.
Heats Up To	N/A	N/A	N/A	550 sq. ft.
Electronic Control	Yes	Yes	Yes	Yes
Remote Control	Yes w/ LCD Digital Display	Yes w/ LCD Digital Display	Yes w/ LCD Digital Display	Yes w/ LCD Digital Display
3 Fan Speeds	Yes	Yes	Yes	Yes
24 Hour Timer	Yes	Yes	Yes	Yes
Refrigerant Type	R-410A	R-410A	R-410A	R-410A
Removable/Washable Filter	Yes	Yes	Yes	Yes
Plug Type	115 Volt  914 watt 8.3 amp	115 Volt  991 watt 9.1 amp	115 Volt  1200 watt 10.2 amp	115 Volt  Cooling/Heating 1390/1180 watt 12.5/11 amp
Dimensions (W x H x D)	10-5/8" x 27-3/8" x 18-7/8"	10-5/8" x 27-3/8" x 18-7/8"	10-5/8" x 27-3/8" x 18-7/8"	17-1/2" x 32-3/4" x 19"
Weight	59.5 lbs	60.6 lbs	62.8 lbs	83 lbs
Cord Length	80"	80"	80"	72"
Fits Window Width (min/max)	19-5/8" to 55-1/8"	19-5/8" to 55-1/8"	19-5/8" to 55-1/8"	28-1/4" to 96"
Safety Certification				
Warranty	1 Year	1 Year	1 Year	1 Year

Portable Air Conditioners **MUST BE VENTED OUTSIDE**. They can be vented out most single-hung, double-hung or sliding windows.

WINDOW AIR CONDITIONERS









BTU's	5,000	6,000	6,000
Menard SKU	623-5399	623-5401	623-5431
Model #	EWK-05CM5	EWK06CRN1/ 06CR5	EWK+06CW5
Cools Up To	150 sq. ft.	250 sq. ft.	250 sq. ft.
EER	11.1	11.2	11.2
Energy Saving Mode	No	Yes	Yes
Electronic Controls	No	Yes	Yes
Remote Control	No	Yes, w/LCD Digital Display	Yes, w/LCD Digital Display
Wi-Fi	No	No	Yes
3 Fan Speeds (Cooling and Fan Only)	No Speeds	Yes	Yes
Air Direction	2-Way	4-Way	2-Way
24 Hour Timer	No	Yes	Yes
Refrigerant Type	R410A	R410A	R410A
Removable/ Washable Filter	Yes	Yes	Yes
Plug Type	115 volt  515 watt - 4 amp	115 volt  536 watt - 5 amp	115 volt  536 watt - 5 amp
Dimensions (W x H x D)	16" x 12" x 15-3/8"	18-1/2" x 13-3/8" x 15-3/4"	18-5/8" x 13-1/3" x 16-1/3"
Weight	39.6 lbs	44.7 lbs	45 lbs
Cord Length	75-1/4"	75-1/4"	76"
Fits Minimum Opening (Width min/max, height)	23" to 36"W, 13"H	23" to 36"W, 14"H	23" to 36"W, 14"H
Safety Certification			
Warranty	1 Year full warranty from original purchase date.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.

EER (Energy Efficiency Ratio): The EER measures the efficiency of your air conditioner. The higher the ratio, the less the unit will cost to operate. The EER is calculated by taking the BTU (British Thermal Unit) number divided by the wattage of the unit.
Example: 10,000 BTU ÷ 1020W = 9.8 EER

WINDOW AIR CONDITIONERS









8,000	8,000	10,000	BTU's
623-5402	623-5432	623-5403	Menard SKU
EWK08CRN1/ 08CR5	EWK+08CW5	EWK10CRN1/ 10CR5	Model #
350 sq. ft.	350 sq. ft.	450 sq. ft.	Cools Up To
11.3	11.3	11.3	EER
Yes	Yes	Yes	Energy Saving Mode
Yes	Yes	Yes	Electronic Controls
Yes, w/LCD Digital Display	Yes, w/LCD Digital Display	Yes, w/LCD Digital Display	Remote Control
No	Yes	No	Wi-Fi
Yes	Yes	Yes	3 Fan Speeds (Cooling and Fan Only)
4-Way	2-Way	4-Way	Air Direction
Yes	Yes	Yes	24 Hour Timer
R410A	R410A	R410A	Refrigerant Type
Yes	Yes	Yes	Removable/ Washable Filter
115 volt  708 watt - 6.2 amp	115 volt  708 watt - 6.2 amp	115 volt  880 watt - 7.8 amp	Plug Type
18-1/2" x 13-3/8" x 15-3/4"	18-5/8" x 13-1/3" x 16-1/3"	19" x 14-5/8" x 21-1/2"	Dimensions (W x H x D)
48.6 lbs	49 lbs	62 lbs	Weight
75-1/4"	76"	75-1/4"	Cord Length
23" to 36"W, 14"H	23" to 36"W, 14"H	23" to 36"W, 15-1/2"H	Fits Minimum Opening (Width min/max, height)
			Safety Certification
1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 Year parts & labor from origi- nal purchase date. Limited 2nd through 5th year sealed system war- ranty.	Warranty

Energy Saving Mode: This function is available on COOL, DRY, AUTO (only AUTO-COOLING and AUTO-FAN) modes. The fan will continue to run for 3 minutes after the compressor shuts off. The fan then cycles on for 2 minutes at 10 minutes intervals until the room temperature is above the set temperature, at which time the compressor turns back on and Cooling starts.

WINDOW AIR CONDITIONERS



BTU's	10,000	12,000	15,000
Menard SKU	623-5433	623-5404	623-5405
Model #	EWK+10CW5	EWK12CRN1/ 12CR5	EWK15CRN1/ 15CR5
Cools Up To	450 sq. ft.	550 sq. ft.	750 sq. ft.
EER	11.3	11.3	11.2
Energy Saving Mode	Yes	Yes	Yes
Electronic Controls	Yes	Yes	Yes
Remote Control	Yes, w/LCD Digital Display	Yes, w/LCD Digital Display	Yes, w/LCD Digital Display
Wi Fi	Yes	No	No
3 Fan Speeds (Cooling and Fan Only)	Yes	Yes	Yes
Air Direction	2-Way	4-Way	4-Way
24 Hour Timer	Yes	Yes	Yes
Refrigerant Type	R410A	R410A	R410A
Removable/ Washable Filter	Yes	Yes	Yes
Plug Type	115 Volt  880 Watt - 7.8 AMP	115 Volt  1,062 Watt - 9.4 AMP	115 Volt  1,339 Watt - 12 AMP
Dimensions (W x H x D)	19" x 14-2/3" x 22"	19" x 14-5/8" x 21-1/2"	23-5/8" x 17-7/8" x 25-3/8"
Weight	63 lbs	68 lbs	103.6 lbs
Cord Length	78"	75-1/4"	63-1/2"
Fits Minimum Opening Width min/max, height)	23" to 36"W, 15-1/2"H	23" to 26"W, 15-1/2"H	26-1/2" to 40- 1/2"W, 18-1/2"H
Safety Certification			
Warranty	1 Year parts & labor from origi- nal purchase date. Limited 2nd through 5th year sealed sys- tem warranty.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.

AIR CONDITIONER ACCESSORIES



Window Supports

Small Support

- 5-10K BTU
- Universal - fits most windows
- Transfers the weight of the AC to the outside wall 459-2898







Large Support

- 12-25K BTU 459-2908



WINDOW AIR CONDITIONERS



18,500	25,000	8,000 Slider	BTU's
623-5406	623-5407	623-5410	Menard SKU
EWK18CRN1/ 18CR5	WEK25CRN1/ 25CR5	EWC08CRN1/ 08CR5	Model #
1000 sq. ft.	1580 sq. ft.	350 sq. ft.	Cools Up To
11.2	9.8	10.9	EER
Yes	Yes	Yes	Energy Saving Mode
Yes	Yes	Yes	Electronic Controls
Yes, w/LCD Digital Display	Yes, w/LCD Digital Display	Yes, w/LCD Digital Display	Remote Control
No	No	No	Wi Fi
Yes	Yes	Yes	3 Fan Speeds (Cooling and Fan Only)
4-Way	4-Way	4-Way	Air Direction
Yes	Yes	Yes	24 Hour Timer
R410A	R410A	R410A	Refrigerant Type
Yes	Yes	Yes	Removable/ Washable Filter
230 Volt  1,652 Watt - 7.9 AMP	230 Volt  2,557 Watt - 11.3 AMP	115 Volt  734 Watt - 6.6 AMP	Plug Type
23-5/8" x 17-7/8" x 25-3/8"	26-1/2" x 18-5/8" x 26-1/2"	14-3/4" x 23-1/2" x 21"	Dimensions (W x H x D)
114 lbs	129.8 lbs	70 lbs	Weight
63-1/2"	63-1/2"	90"	Cord Length
26-1/2" to 40- 1/2"W, 18-1/2"H	31" to 42"W, 19-1/2"H	15-1/2" to 16- 1/3"W, 21-1/3"H	Fits Minimum Opening (Width min/max, height)
			Safety Certification
1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 Year parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	Warranty

**Air Conditioner
Vinyl Side
Panels**
459-2911







**Air Conditioner
Coil Foaming
Cleaner**
459-2920



**Air Conditioner
Fin Cleaning
Tool**
459-2937

THROUGH THE WALL AIR CONDITIONERS



BTU's	10,000	14,000	Sleeve	
Menard SKU	623-5420	623-5421	623-5430	
Model #	EWV10CRN1/ 10CR5	EWV14ERN1/ 14ER5	MP. Sleeve	
Cools Up To	450 sq. ft.	700 sq. ft.	<p>Fits nearly any Through the Wall Air Conditioning Unit. Use this with sku 623-5420 and 623-5421 to properly secure your Through the Wall A/C Unit.</p> <p><i>It may not be needed if you already have an existing sleeve in place.</i></p>	
Heats Up To	N/A	450 sq. ft.		
EER	9.8	9.3		
Energy Saving Mode	Yes	Yes		
Electronic Controls	Yes	Yes		
Remote Control	Yes, w/LCD Digital Display	Yes, w/LCD Digital Display		
3 Fan Speeds (Cooling and Fan Only)	Yes	Yes		
Air Direction	4-Way	4-Way		
24 Hour Timer	Yes	Yes		
Refrigerant Type	R410A	R410A		
Removable/Washable Filter	Yes	Yes		
Plug Type	115 Volt  1020 watt - 9.8 amp	230 Volt  1650 watt - 6.9/15 amp (cool/heat)		
Dimensions (WxHxD)	24-1/4" x 14-1/2" x 20-1/4"	21-1/4" x 14-1/2" x 20-1/4"		25-1/2" x 17-1/2" x 15-1/4"
Weight	66 lbs	78.1 lbs		23 lbs
Cord Length	66"	78"	N/A	
Safety Certification			N/A	
Warranty	1 year for parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 year for parts & labor from original purchase date. Limited 2nd through 5th year sealed system warranty.	1 year	

AIR CONDITIONER ACCESSORIES



Air Conditioner Cover
27"W x 18"H x 22"D
567-2459





Air Conditioner Cover
28"W x 20"H x 30"D
567-2462



Air Conditioner Foam Seal
1-1/4" x 42"
567-2433



THROUGH THE WALL AIR CONDITIONERS

9,000	12,000	12,000	15,000
623-7300	623-7304	623-7308	623-7312
HCC-C09HP-A	HCC-C12HP-A	HCC-C12-A	HCC-C15HP-A
300 sq. ft.	450 sq. ft.	450 sq. ft.	600 sq. ft.
300 sq. ft.	450 sq. ft.	N/A	600 sq. ft.
11.32	10.34	10.34	9.55
No	No	No	No
Digital Display	Digital Display	Digital Display	Digital Display
No	No	No	No
No/2 Speed Fan	No/2 Speed Fan	No/2 Speed Fan	No/2 Speed Fan
2-Way	2-Way	2-Way	2-Way
No	No	No	No
R410A	R-410A	R-410A	R-410A
Yes	Yes	Yes	Yes
230 Volt  795 watt - 3.8/3.9 amp (cool/heat)	230 Volt  1,150 watt - 5.5/4.9 amp (cool/heat)	230 Volt  1,500 watt - 5.5 amp (cool/heat)	230 Volt  1,570 watt - 7.5/6.6 amp (cool/heat)
42" x 16" x 21"	42" x 16" x 21"	42" x 16" x 21"	42" x 16" x 21"
108 lbs	110 lbs	110 lbs	112 lbs
66"	66"	66"	66"
			
5 year compressor, 1 year components	5 year compressor, 1 year components	5 year compressor, 1 year components	5 year compressor, 1 year components

Packaged Terminal Air Conditioners

are designed for use in hotel rooms, apartments and other commercial-style buildings with through-the-wall installations. These models feature cooling, heating and fan-only mode for year-round use and can be hard-wired to existing room thermostats for convenience.

Optional sleeve and grill available by special order.

Model HCC-C-SG



**Air
Conditioner
Foam Seal**
2-1/4" x 42"
567-2394

PEDESTAL/STAND



COMFORT ZONE.

16" Pedestal Fan

- Three speed settings
 - Oscillation
 - Adjustable tilt
- 621-1114



LASKO
Innovating in Home Comfort

18" Pedestal Fan


- Three speed settings
 - Programmable timer and oscillation
 - Adjustable tilt
- 621-1120



COMFORT ZONE.

18" Pedestal Fan

- Three speed settings
 - Oscillation
 - Adjustable tilt
- 621-1118

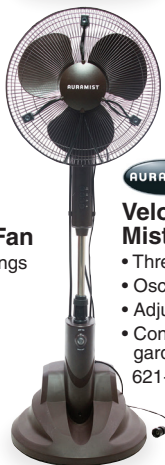


AURAMIST

Velos 16" Misting Fan

- Three speed settings
 - Oscillation
 - Adjustable mist and tilt
 - Connects to garden hose
- 621-1442

WALL




AIR MONSTER®

16" Wall Fan

- Three speed settings
 - Oscillation
 - Adjustable tilt
- 621-1426

TOWER

RESIDENTIAL FANS




31" Tower Fan

- Three speed settings
 - Oscillation
 - Built-in carry handle
- 621-1623



36" Tower Fan

- Three speed settings
 - Programmable timer and oscillation
- 621-1614



Holmes® 38" Tower Fan

- Eight speed settings
 - Timer and oscillation
- 621-1441



42" Wind Curve Fan

- Three speed settings
 - Timer and oscillation
- 621-1619



VORNADO® Tower Air Circulator

- Four speed settings
 - V-Flow™ circulation for constant airflow
- 621-1332

DESK/TABLE


OceanAire™
4" Personal Fan

- Two speed settings
 - Includes adapter for USB or A/C
 - Adjustable tilt
- 621-1653


6" Clip Fan

- Two speed settings
 - Use the clip to hang or the base to use on a flat surface
 - Adjustable tilt
- 621-1571


8" Turbo Fan

- Three speed settings
 - Adjustable tilt
- 621-1299


Honeywell
**Turbo Table
Air Circulator**

- Three speed settings
 - Adjustable tilt
- 621-1300


**Desktop Air
Circulator**

- Three speed settings
 - Vortex technology fully circulates all the air in the room
- 621-1330


Honeywell
Oscillating Turbo Air Circulator

- Three speed settings
 - Adjustable tilt
- 621-1297



COMFORT ZONE.
12" Oscillating Table Fan

- Three speed settings
 - Oscillation
 - Adjustable tilt
- 621-1450



NOVELTY

O2COOL
cool by design™

Carabiner Misting Fan

- Soft foam safety blades
 - Uses 1AA battery (not included)
- 621-5011



O2COOL
cool by design™

10" Battery Fan With Adapter

- Two speed settings
 - Adjustable tilt
 - Runs on AC adapter (included) or 8 D-cell batteries (not included)
- 621-5014



O2COOL
cool by design™

Deluxe Misting Fan

- Comfort hand grip and pump trigger spray
 - Uses 2AA battery (not included)
- 621-5010



cool*mate

Misting Fan

- Two speed settings
 - Use only with distilled water
- 621-5055




WINDOW



9" Twin Window Fan With Thermostat


- Three speed settings
- Electrically reversible motors for intake, exhaust or exchange settings
- Digital controls and thermostat
- Fits windows from 22-1/2" to 33" wide 621-1315

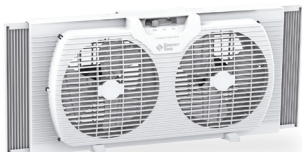

9" Twin Window Fan

- Two speed settings
- Fits windows from 22-1/2" to 33" wide 621-1316

AIR CIRCULATOR/BOX

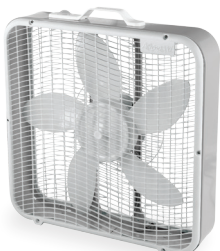

Aerospeed

20" Box Fan

- Three speed settings 621-1117



20" Performance Box Fan

- Three speed settings
- Weather-Shield® motor for window use 621-1562



Aerospeed

20" Air Circulator

- Three speed settings
- Adjustable tilt 621-1670



20" Cyclone Air Circulator

- Three speed settings
- Adjustable tilt 621-1660

Honeywell

Turbo Air Circulator

- Three speed settings
 - Adjustable tilt
- 621-1296



VORNADO

Air Circulator

- Three speed settings
 - Vortex technology fully circulates all the air in the room
- 621-1303



VORNADO

Whole Room Air Circulator

- Four speed settings
 - Moves air up to 100'
 - Adjustable tilt
 - Vortex technology fully circulates all the air in the room
- 621-1331



MISTING SYSTEMS



Misting System

- Portable misting system connects to an outdoor faucet or garden hose to deliver a cooling mist wherever you need it
 - Kit includes 10' of 1/4" mist tubing, six misting nozzles, hanging clips and hose adapter
- 621-5068



Misting System

- 3/8" x 10' misting system 621-5066
- Can be extended up to 100' by using the 10' extension system 621-5067

FLOOR




14" Floor Fan

- 2,000 CFM
- Three speed control
- Adjustable tilt
- 8 lbs. 621-1481



18" Oscillating Floor Fan

- 4,400 CFM
- Three speed control
- Adjustable tilt and wide angle oscillation
- 11.5 lbs. 621-1483

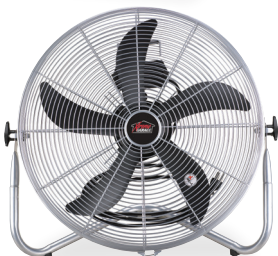

20" Floor Fan

- 4,600 CFM
- Three speed control
- Adjustable tilt
- All-metal cage
- 11 lbs. 621-1505



20" High Velocity Shroud Fan

- 5,200 CFM
- Four speed control
- Heavy-duty enclosed motor
- Adjustable tilt
- 14.6 lbs. 621-1484

DRUM



24" Drum Fan

- 6,300 CFM
- Three speed control
- Sturdy tilt base
- 37 lbs. 621-1514




30" Drum Fan

- 9,000 CFM
- Three speed control
- Sturdy tilt base
- 63 lbs. 621-1506



36" Drum Fan

- 9,000 CFM
- Two speed control
- 52 lbs.
- 621-1717

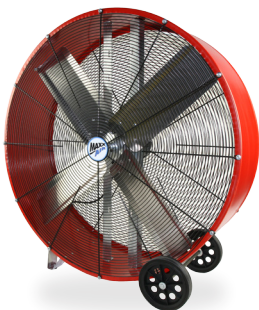

42" Drum Fan

- 13,300 CFM
- Two speed control
- 90 lbs.
- 621-1718



48" Drum Fan

- 18,000 CFM
- Two speed control
- 101 lbs.
- 621-1719



AIR MOVER

**STANLEY****Pivoting Utility Fan**

- Three speed control and pivoting head
- Dual outlets for daisy chaining
- 10' cord 621-1607

**1/8 HP Air Mover**

- 600 CFM
- Three speed control with timer
- Dual outlets for daisy chaining
- 8.7 lbs.
- 1.5 amp
- 10' cord 621-1527

**1/4 HP Air Mover**

- 1,100 CFM
- Three speed control
- Includes removable and washable filter kit
- 16 lbs.
- 3 amp
- 20' cord 621-1531

**1/3 HP Air Mover**

- 2,400 CFM
- Three speed control with timer
- Dual outlets for daisy chaining
- 21.8 lbs.
- 3.8 amp
- 25' cord 621-1529

**1 HP Air Mover**

- 4,000 CFM
- Three speed control
- Telescopic handle and wheels
- 39.5 lbs.
- 10.2 amp
- 25' cord 621-1532

**1/3 HP Axial Commercial Fan with Timer**

- 3,600 CFM
- Variable speed control
- Includes dual outlets for daisy chaining and 3-hour timer
- Adjustable tilt
- 24.8 lbs.
- 2.4 amp • 20' cord 621-1535

STAND



20" Stand Fan

- 5,000 CFM
- Three speed control
- Easy height adjustment
- Adjusts from 45-1/2" to 51" total height
- Adjustable tilt
- 18 lbs. 621-1515



24" Stand Fan

- 6,000 CFM
- Three speed control
- Adjustable tilt and wide angle oscillation
- Tool-free height adjustment from 51" to 65"
- 40 lbs. 621-1491



30" Stand Fan


- 9,000 CFM
- Three speed control
- Easy height adjustment
- Adjusts from 62" to 84" total height
- 51 lbs. 621-1507

WALL



18" Oscillating Fan

- 4,000 CFM
- Three speed control and oscillation
- Adjustable tilt
- 11.5 lbs. 621-1516



18" Wall Fan Weather Rated

- 4,000 CFM
- Three speed control
- Heavy-duty, fully enclosed motor
- Adjustable tilt • 16.4 lbs. 621-1517



30" Wall Fan Weather Rated

- 8,900 CFM
- Three speed control
- Heavy-duty, fully enclosed motor
- Adjustable tilt • 42.3 lbs. 621-1519



Too Much Water?
From Dehumidifiers to
Air Movers We Have
You Covered



MENARDS®

903-6080