


BOULE DE CRISTAL ROUND CHANDELIER 36"

PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Nipple (1)
- (C) Canopy (1)
- (D) Mounting Loop (1)
- (E) Canopy Ring (1)
- (F) Hanging Loop (1)
- (G) 6" Extension Rods (2)
- (H) 12" Extension Rods (2)
- (I) Light Fixture (1)
- (J) 18" Extension Rods (2)
- (K) Connective Tubes (5)
- (L) Sockets (18)
- (M) Glass Shades (18)
- (N) Bulbs (18)
- (O) Set Screw (1)
- (P) Allen Wrench (1)

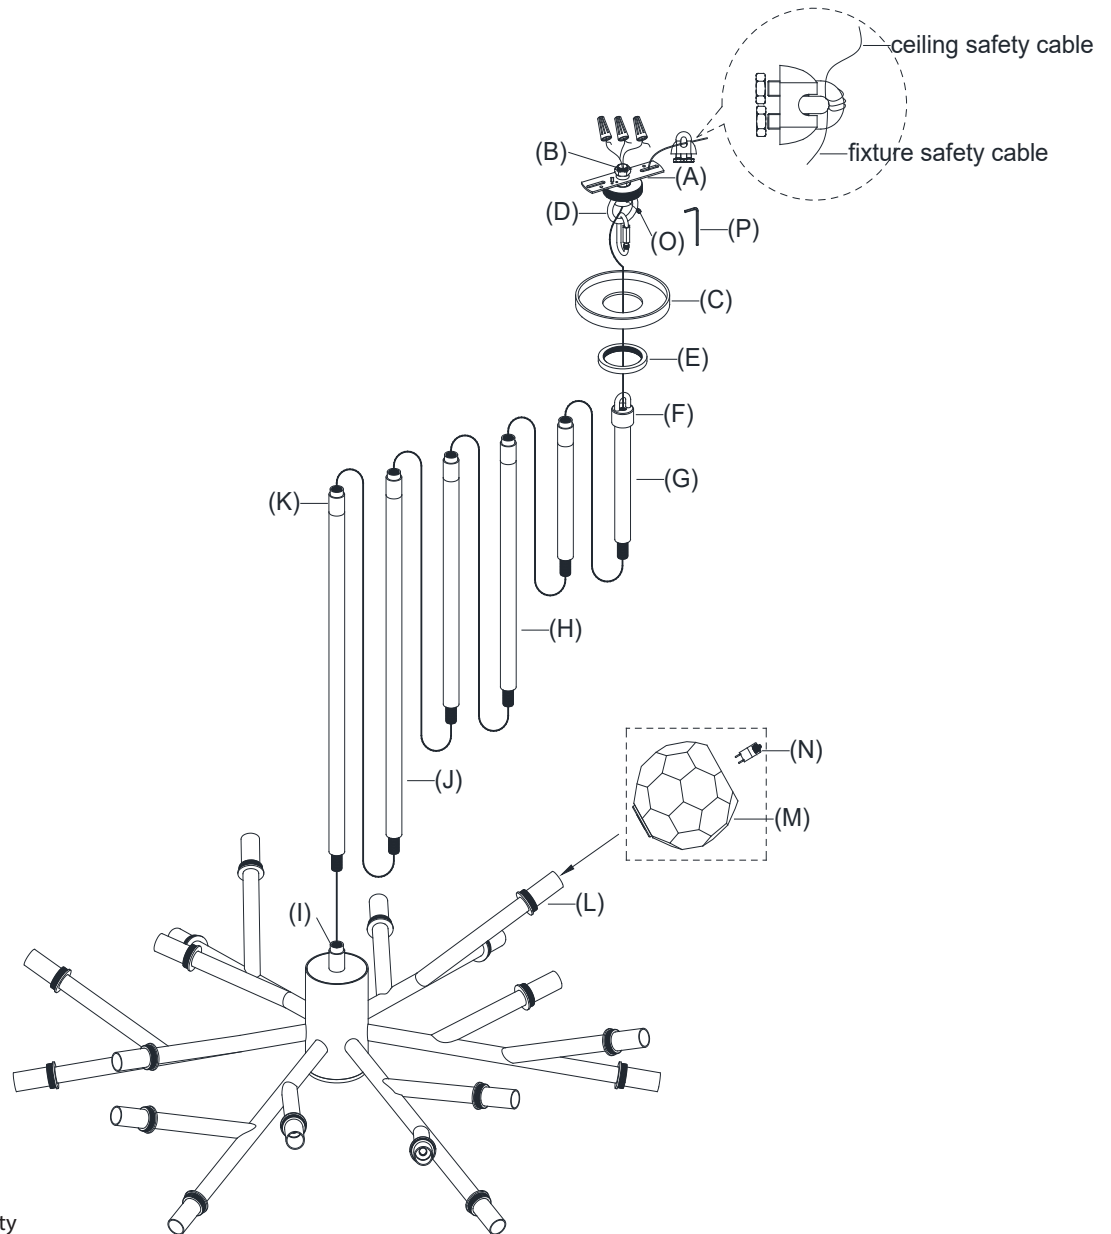

SAFETY CABLE ASSEMBLY

1. Join fixture safety cable with safety cable from ceiling.
2. Wrap both safety cables around the cable lock nut.
3. Secure by tightening both hex nuts until tight.

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to eighteen (18) 20-Watt Type T4 lightbulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic coverings.
- Determine the hanging length of chandelier. Connect Light Fixture (I) to some or all Extension Rods (G) (H) (J) and Connective Tubes (K) according to the height needed.
- Thread Hanging Loop (F) onto the inner connection rod of the top cord cover.
- Hook Hanging Loop (F) to the closable link on Mounting Loop (D).

ASSEMBLY & INSTALLATION CONT.

- Unscrew Canopy Ring (E). Slide Canopy Ring (E) and Canopy (C) onto the closable link on Mounting Loop (D).
- Attach Mounting Strap (A) to the ceiling and secure with mounting screws (not included) and proper fasteners from your local hardware store.
- Insert Nipple (B) into the center hole of Mounting Strap (A).
- Insert Nipple (B) into Mounting Loop (D). Note: You can use Allen Wrench (P) to tighten Set Screw (O) in place.
- Feed the wires through Extension Rods (G) (H) (J), Hanging Loop (F), Mounting Loop (D), and Canopy (C).
- Connect the safety steel wire from the fixture and the safety cable from ceiling (refer to the illustration on the previous page).
- Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the neutral wire. The second wire's covering is smooth – this is the hot wire. The bare wire is the ground wire.
- Connect the ground wire from the fixture with the ground wire (usually bare) from your ceiling outlet box using a wire nut. If your house does not have ground wire, then attach the ground wire from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
- Connect the neutral wire from your fixture with the neutral wire (usually white) from your ceiling outlet box using a wire nut.
- Connect the hot wire from your fixture with the hot wire (usually black) from your ceiling outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
- Attach Canopy (C) with Light Fixture to the affixed Mounting Strap (A) and secure with Canopy Ring (E).
- Thread Glass Shades (M) onto Sockets (L).
- Insert Bulbs (N) into Sockets (L).
- Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.