

## **Application: How to Package a Component**

**DIN-0005**

## Revision History

---

Created	Rev	Comment
Mar 26	x1	Initial Content by GN
Nov 23	X2	Ported to Word by shayhurs

## KnowledgeBase Articles

---

Application: Create APP Package	4153
Application: How to create a new user to Application	5171
Application: Accessing the Configuration Manager Console	2567

# Contents

---

<b>Overview</b> .....	<b>4</b>
<b>Prerequisites</b> .....	<b>4</b>
<b>Background</b> .....	<b>4</b>
<b>1. Package the Component</b> .....	<b>6</b>
Create the Package .....	6

## Overview

---

This document describes how to create an APP Package from a component that was based off a component template.

**Note:** Excellent supplemental material to this document is available in the Application Users Guide located here:

<http://APPApplicationUserGuide.pdf>

## Prerequisites

---

Prior to starting the Application Deployment Process, the user must have the following:

- A MGMT.PROD account to authenticate in to Application. See the following KnowledgeBase article to request one account from the SOC.

[http://App\\_Hlp/docs/DOC-1575](http://App_Hlp/docs/DOC-1575)

**Note:** Leave Sections 4 and 5 of request form blank as account is only necessary for authentication.

- You will need a Application account. After account is created, email the Enterprise Team to add account to Application. See the following KnowledgeBase Article for more information on adding a Application account:

[http://App\\_Hlp/docs/DOC-5171](http://App_Hlp/docs/DOC-5171)

- Log onto the PRODTS01 or PRODTS02 terminal servers with the MGMT.PROD account.

**Note:** You may need to launch a VPN to access from Desktop.

- Start the Configuration Manager. See the following KnowledgeBase article regarding the Application Configuration Manager:

[http://App\\_Hlp/docs/DOC-2567](http://App_Hlp/docs/DOC-2567)

or the following document:

*DIN-0016, Application: Accessing the Configuration Manager Console*

## Background

---

This article also assumes you have already discovered your components via the Discovery KnowledgeBase article ([http://App\\_Hlp/docs/DOC-4300](http://App_Hlp/docs/DOC-4300)).

**Note:** There are server specific properties that you can take advantage of in your package to set the PROD dir, LOGS dir etc. This solves the problem of the app being installed on different drives in DEV, QA, PROD.

See the following KnowledgeBase article:

[http://App\\_Hlp/docs/DOC-5280](http://App_Hlp/docs/DOC-5280)

# 1. Package the Component

## Create the Package

1. Right click on your component.
2. Select 'Add to Depot As APP Package'. The Application Package Dialogue will appear.

Figure 1




3. Name your package.

**Note:** Standard is AppName\_DateTime.

4. Save the package in the depot where your App\_Unit apps go (e.g., Ex Company-Line of Business-> COMPANY.COM->Fantasy->League Manager). The 'Components' radio button will be selected since you are packaging a component.

Figure 2

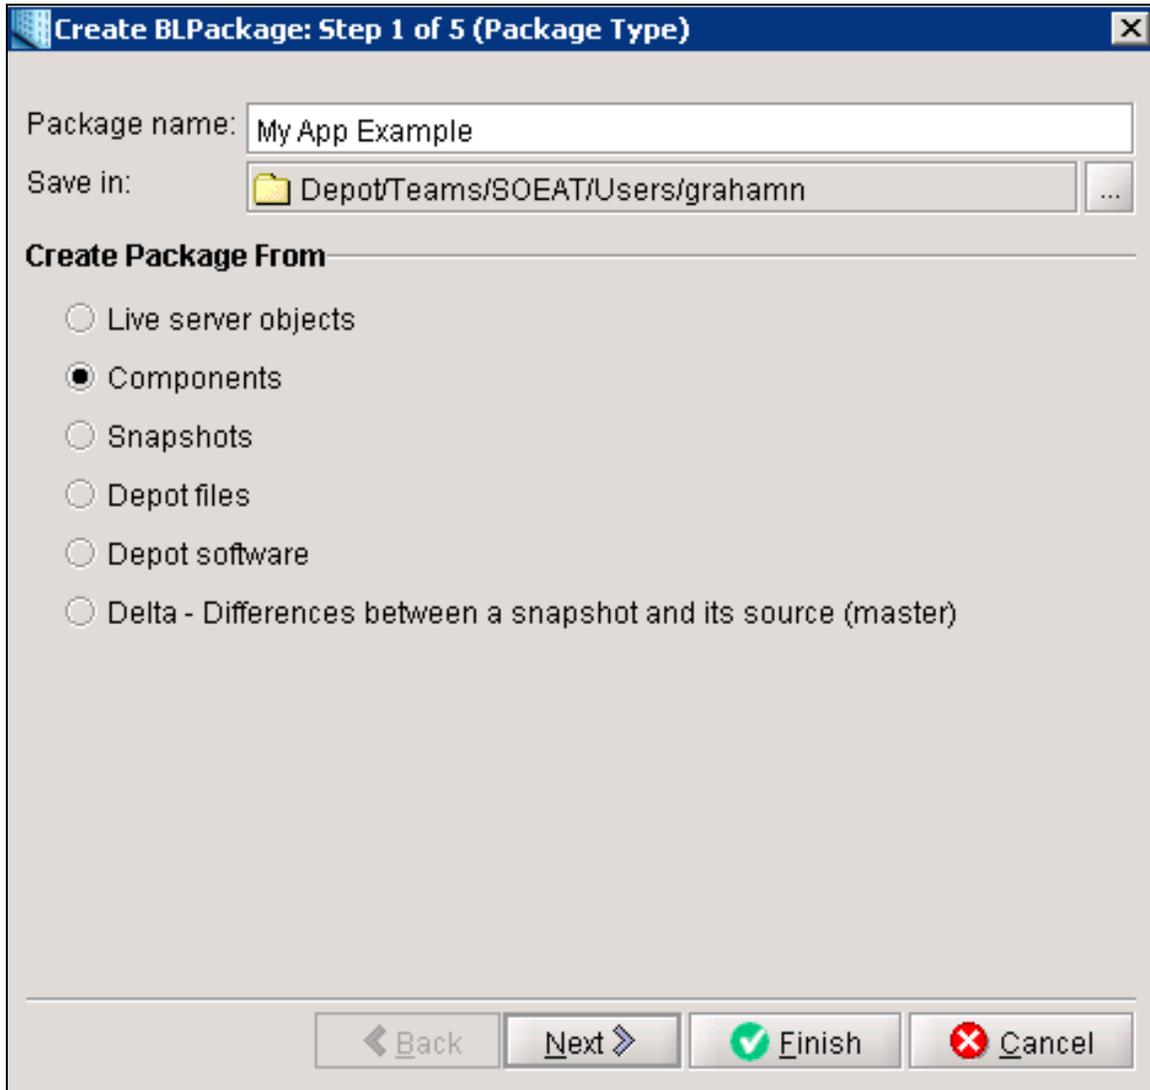

5. Click 'Finish'. At this time, Application will create your package. This can take a few minutes if your build server is remote to Seattle.

Figure 3

